





MacLean™  
**HIGHLINE**


## EXTENSIONS FOR UTILITY BOXES




3" Standard Extension



6" Standard Extension



20" Mainline Valve Box  
Extension

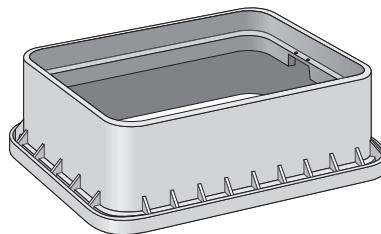

6" Jumbo Extension



3" Round Extension

- SUPERFLEXON material
  - Stronger than structural foam, greater top-load strength
  - More UV and wear resistant than structural foam
- 10 Year Lid Guarantee
- Lighter than cast iron or concrete extensions
  - Easier warehouse handling
  - Reduced injury potential
- Available in a variety of shapes and sizes
- Snap locks on drop-in lid
  - Discourage vandalism
  - Keep lid in place in high water
- Lids are easily interchangeable
- T-Top lid will fit boxes of other manufacturers

"You're Covered!"



# EXTENSIONS FOR UTILITY BOXES

DESCRIPTION	PART #	DESCRIPTION	PART #
<b>EXTENSIONS</b>		<b>ACCESSORIES</b>	
<b>Standard Box</b>		Lexan Bolt – Pentagon Lock	143003
3" Black Extension Only	170102	Lexan Locking Nut – Pentagon Lock	143013
6" Black Extension Only	170103	Hexagon Steel Bolt	143014
<b>Jumbo Box</b>		8" Stainless Steel Hinge Pin	144004
6"H Black	190110	Cast Iron Flip Lid Only	172002
<b>10" Round Box</b>		Plastic Flip Lid Only	172003
3"H Black	181026	Plastic Flip Lid, Latch & Screw w/Lock	172114
<b>5 1/4" Adjustable Valve Box</b>			
20" Adjustable Extension	111146		

## SUPERFLEXON BOXES AND COVERS

SUPERFLEXON is a plastic material made of a rigid combination of polyolefin and fibrous inorganic components. It is chemically inert and normally unaffected by moisture, corrosion and the effects of temperature changes. SUPERFLEXON also has a high tensile strength with light weight because it is a solid (not foamed) structural material.

SUPERFLEXON covers are NOT traffic covers and should not be used in roadways, etc.

Physical Properties	ASTM Test Method	Minimum Test Value
Tensile Strength (2.0"/min.)	D-638-82a	3,400 psi
Flexural Modulus	D-790-81	191,000 psi
Compressive Strength (0.05"/min.)	D-695-80	3,350 psi
Impact Strength, Izod	D-256-81	0.6 ft. lb/in.
Durometer Hardness, Type D	D-2240-81	60
Deflection Temp. @ 66 psi Stress	D-648-82	230°F
Specific Gravity	D-792-66 (1979)	1.15



481 Munn Road, Suite 300, Fort Mill, SC 29715, USA  
 Phone: 803.628.4380 • Fax: 803.792.4612  
 E-mail: info@macleanhighline.com  
 www.highlineaccessboxes.com